

YL-60 / YL-60S

YL-60圓棒製造機
ROUND ROD MILLING MACHINEYL-60S雙軸圓棒製造機
DOUBLE SPINDLE ROUND ROD MILLING MACHINE

電磁開關控制
附微動開關，護蓋打開機械停止運轉（選配）
Shown with optional magnetic starter and cutterhead
cover limit switch protection (Optional)

ROUND ROD MILLING MACHINE
DOUBLE SPINDLE ROUND ROD MILLING MACHINE

特性

- 專為四方木頭加工成圓棒而設計，加工範圍：直徑 $\phi 6$ - $\phi 60$ mm。
- 新研發優於單頭圓棒製造機，操作省時、省力且加工物完成後更平滑。(YL-60S)
- 雙刀頭設計，提供粗加工及細加工一次完成。(YL-60S)
- 絕佳適合加工材質：木、藤、壓克力等類似材質。
- 四段變速：適合不同材質之加工物。
- 安全保證：進料輪護蓋裝置，運轉部份密封、刀頭蓋打開即停止運作。（此裝置為選配）
- 電磁開關控制。(YL-60S)
- 圓棒機之多重刀具裝置，專利號碼36565。
- 圓棒機簡便進料安全裝置，專利號碼37270。

Machine Feature

- Designed for cutting stick from square into round rod, cutting stick up to 60mm in diameter.
- Better than a single head machine, the YL-60S twin head machine offers smoother surface and saves finish time.
- Built with 2 cutterheads, provides coarse and finish cutting sequence in one pass.
- Excellent for making round rod as material like wood, rattan, acrylic and similar material.
- 4 cutting feed speeds to suit the various materials.
- Maximum safety is guaranteed by such features as feed rolls guard, fully enclosed transmission parts.
- Magnetic switch control. (YL-60S)
- Patented multiple cutterheads No. 36565
- Patented feed rolls guard No. 37270

規格表

型號 Type	YL-60	YL-60S
加工範圍 Range of working diameter	$\phi 6$ to $\phi 60$ mm	$\phi 6$ to $\phi 60$ mm
加工長度 Range of working length	300mm~無限長Unlimited	400mm~無限長Unlimited
主軸馬力 Drive motor	5HP	7.5HP/5HP
送料馬力 Feed motor	2HP	2HP
主軸轉速 Cutterhead speed	3400 R.P.M	6000 R.P.M
送料速度 Range of feed speed	10/12/14/16 m/min(4 speeds)	14/16/18/20 m/min(4 speeds)
排屑管口直徑 Chip chute diameter	$\phi 100$ /mm ($\phi 4"$)	$\phi 100$ /mm ($\phi 4"$)
機械尺寸(長X寬X高) Machine size(LXWXH)	800x690x910mm	1360x690x910mm
裝箱尺寸(長X寬X高) Machine size(LXWXH)	890x730x1150mm	1470x715x1150mm
淨重 Net weight	320kg	560kg
毛重 Gross weight	370kg	650kg

配件


STANDARD ACCESSORIES

刀頭 Cutter head	出料輪 Outfeed roll
導套 Guide bush (↓ $\phi 42$ mm)	導管 Guide tube (↑ $\phi 42$ mm)
刀片 12mm (↓ $\phi 42$ mm) 12mm H.S.S Knife	刀片 18mm (↑ $\phi 42$ mm) 18mm H.S.S Knife

PROFESSIONAL
& HIGH ENRGY

氣壓立式砂光機 AIR VERTICAL SANDER

型號 MODEL	YL-16
加工長度 Sanding length	15-180 mm
加工直徑 Sanding dia.	$\phi 20$ -150 mm
工件數 No. of workpiece	16 pcs
砂布數 Layer no. of sanding paper	9 sets + 1 grit sander
馬達 Motor	3 HP x 1 1/2 HP x 3
裝箱尺寸 Packing size	185 x 170 x 205 cm
淨重 / 毛重 N. W./G. W.	750/900 kgs

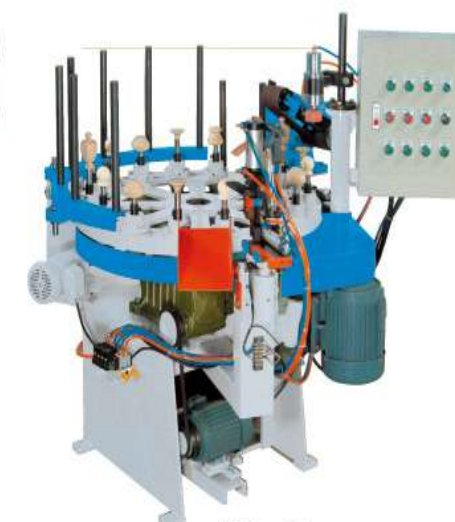

YL-16



YL-1200



YL-1200G · YL-1000AG
獨立特砂輪 Grit sander
(選配附件Opt.)



YL-1000A

自動車枳砂光機 AUTO. TURNING SANDER

型號 MODEL	YL-1200	YL-1000A
加工長度 Sanding length	50-1200 mm	50-1200 mm
加工直徑 Sanding dia.	$\phi 12$ -120 mm	$\phi 50$ -230 mm
工件數 No. of workpiece	16 pcs	8 pcs
砂布數 Layer no. of sanding paper	8 sets	8 sets
馬達 Motor	7.5 HP x 1 1 HP x 1 1/2 HP x 2	10 HP x 1 1 HP x 1 1/2 HP x 2
裝箱尺寸 Packing size	290 x 180 x 225 cm	290 x 190 x 225 cm
淨重 / 毛重 N. W./G. W.	1650/2000 kgs	2000/2400 kgs



YL-1200



YL-1150H



YL-1500B

油壓仿型木工車床 HYDRAULIC COPYING LATHE

型 號	MODEL	YL-1500B
加工長度	Max. processing length	100-1500 mm
加工直徑	Max. processing dia.	Ø20-120 mm
馬 達	Motor	7.5 HP x 1 3 HP x 1
裝箱尺寸	Packing size	350 x 135 x 205 cm
淨重 / 毛重	N. W./G. W.	1600/1800 kgs

自動背刀式木工車床 AUTO. HYD. BACK-KNIFE TURNING LATHE

型 號	MODEL	YL-1150H	YL-1200	YL-1500
加工長度	Processing length	100-1200 mm	100-1200 mm	200-1500 mm
加工直徑	Processing dia.	Ø12-150 mm ◆105 mm/max	Ø50-250 mm ◆170 mm/max	Ø50-250 mm ◆170 mm/max
馬 達	Motor	10 HP x 1 3 HP x 1	20 HP x 1 3 HP x 1	20 HP x 1 3 HP x 1
裝箱尺寸	Packing size	350 x 180 x 225 cm	350 x 220 x 225 cm	420 x 220 x 247 cm [HQ. container]
淨重 / 毛重	N. W./G. W.	2280/2800 kgs	2800/3300 kgs	3000/3500 kgs

自動油壓木工車床 AUTO. HYD. TURNING LATHE

型 號	MODEL	YL-400
加工長度	Max. processing length	50-400 mm
加工直徑	Max. processing dia.	Ø15-100 mm
馬 達	Motor	5 HP x 1 2 HP x 1
裝箱尺寸	Packing size	190 x 175 x 175 cm
淨重 / 毛重	N. W./G. W.	1300/1450 kgs



YL-400