

重型上下兩面鉋木砂光機

Heavy Duty Top / Bottom Planer Sanders

Thickness setting for solid wood, thin sheet and wood floor sanding.

此機適合：實木定厚、門板定厚、拼板砂光定厚。



N R P
Structural drawing of Cope
上砂構造圖



Structural drawing of drag
底砂構造圖

規格表Specification (Ø300型)

Model No.:	型號	YL-610NP	YL-610NRP	YL-920NP	YL-920NRP	YL-1300NP	YL-1300NRP
Max. working width	最大工作寬度	600 mm	600 mm	900 mm	900 mm	1300 mm	1300 mm
Max. working thickness	最大工作厚度	3-130	3-130	3-130	3-130	3-130	3-130
Standard power	標準馬力	15, 15 HP	15, 20, 15 HP	20, 20 HP	20, 25, 20 HP	30, 25 HP	30, 30, 25 HP
Optional power	選購馬力	20, 20 HP	20, 25, 20 HP	25, 25 HP	30, 25, 20 HP	40, 30 HP	40, 40, 30 HP
Feeding power	輸送馬力	2 HP	3 HP	3 HP	5 HP	5 HP	7 1/2 HP
Table hoist power	升降馬力	1/2 HP	1/2 HP	1/2 HP	1/2 HP	1 HP	1 HP
Brush roller power	棕刷輪馬力	1/2 HP	1/2 HP	1/2 HP	1/2 HP	1 HP	1 HP
Feeding speed	輸送速度	4-20 M/min	4-20 M/min	4-20 M/min	4-20 M/min	4-20 M/min	4-20 M/min
Sanding belt measurement (mm)	砂帶尺寸	630 x 2108	630 x 2108	940 x 2108	940 x 2108	1320 x 2108	1320 x 2108
Sanding belt measurement (mm)	砂帶尺寸 (optional 選配)	630 x 2620	630 x 2620	940 x 2620	940 x 2620	1320 x 2620	1320 x 2620
Air pressure required (kg/cm²)	使用氣壓	6	6	6	6	6	6
Spiral cutting head Dia.(mm)	螺旋刀直徑	Ø180	Ø180	Ø180	Ø180	Ø180	Ø180

YL-1300NRP



YL-1300NRPL


重型上下兩面寬帶砂光機

Heavy Duty Top / Bottom Wide Belt Sanders



These machines suit sanding for solid wood thickness setting, wood floor sanding and lacquered veneer..

此機適合：實木定厚砂光、拼板砂光、地板砂光、底漆砂光等。

Assembly of Sanding Head

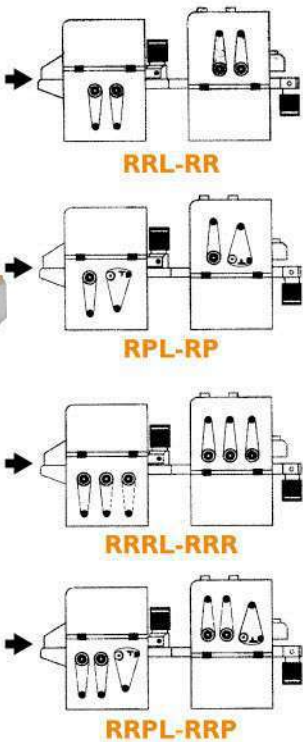

Top-bottom sanding finished in one process without belt conveyor installed, could be connected or stood alone, suitable for solid wood, sealer, and veneer.



滾輪選擇
Size of rubber roller
● Ø300
● Ø220

砂帶尺寸
Size of sanding belt
● 83"
● 103"

規格表Specification (Ø300型)

Model No.:	型號	YL-610RP	YL-610RRP	YL-920RP	YL-920RRP	YL-1300RP	YL-1300RRP
Max. working width	最大工作寬度	600 mm	600 mm	900 mm	900 mm	1300 mm	1300 mm
Max. working thickness	最大工作厚度	3-130	3-130	3-130	3-130	3-130	3-130
Standard power	標準馬力	15, 10 HP	15, 20, 10 HP	20, 15 HP	20, 25, 15 HP	30, 20 HP	40, 30, 25 HP
Optional power	選購馬力	20, 15 HP	20, 25, 15 HP	25, 20 HP	30, 25, 20 HP	40, 30 HP	50, 40, 30 HP
Feeding power	輸送馬力	2 HP	3 HP	3 HP	5 HP	5 HP	7 1/2 HP
Table hoist power	升降馬力	1/2 HP	1/2 HP	1/2 HP	1/2 HP	1/2 HP	1 HP
Brush roller power	棕刷輪馬力	1/2 HP	1/2 HP	1/2 HP	1/2 HP	1 HP	1 HP
Feeding speed	輸送速度	4-20 M/min	4-20 M/min	4-20 M/min	4-20 M/min	4-20 M/min	4-20 M/min
Sanding belt measurement (mm)	砂帶尺寸	630 x 2108	630 x 2108	940 x 2108	940 x 2108	1320 x 2108	1320 x 2108
Sanding belt measurement (mm)	砂帶尺寸 (optional 選配)	630 x 2620	630 x 2620	940 x 2620	940 x 2620	1320 x 2620	1320 x 2620
Air pressure required (kg/cm ²)	使用氣壓	6	6	6	6	6	6

規格表Specification (Ø300型、Ø220型)

Model No.:	型號	YL-610R	YL-920R	YL-1300R	YL-610RR	YL-920RR	YL-1300RR
Unit	砂頭單位	1	1	1	2	2	2
Working width	加工寬度 mm	600	900	1300	600	900	1300
Working thickness min. Max.	加工厚度 mm	3-130	3-130	3-130	3-130	3-130	3-130
Belt width	砂帶寬度 mm	630	940	1320	630	940	1320
Belt length	砂帶長度 mm	1905/2108/2620	1905/2108/2620	1905/2108/2620	1905/2108/2620	1905/2108/2620	1905/2108/2620
Feed speed	送料速度 m/min	4-20 M/min	4-20 M/min	4-20 M/min	4-20 M/min	4-20 M/min	4-20 M/min
Feed power	送料馬力 HP	1 HP	2 HP	3 HP	2 HP	3 HP	5 HP
Table lifting power	升降馬力 HP	1/2 HP	1/2 HP	1/2 HP	1/2 HP	1/2 HP	1 HP
Air pressure bar	使用壓力 kg/cm ²	6	6	6	6	6	6