


- YL- W20 -T
- YL- W30 -T
- YL- W40 -T

特性

- 本機適用於平面塗裝。經本機處理過的工件，表面光滑、無色差。
- 每個滾輪應用獨立的變頻器做電子控制，產品品質可利用均佈滾筒的速度及壓力做調整可將漆完美的塗在工件上。
- 獨家鳩尾槽支撐系統的應用頭。
- 利用具有自動皮帶定位系統的皮帶輪運送工件。
- 清潔刀片具有外部的靠近及分離控制（不必升起保護柵欄）。
- 具有快速更換滾輪系統。
- 氣動雙隔膜泵浦，不產生火花，安全更不會有空氣污染之慮。
- 電動升降裝置與限動開關保護膠輪超厚斷電停止。
- 此機器可與加長型輸送機共用。

FEATURES

- This machine is applied for flat coating, providing workpieces of smooth finishing and consistent color.
- Each roller is independently controlled by a frequency inverter. The smoothing roller speed and pressure are adjustable, ensuring perfect coating on workpiece.
- The application head is supported by the exclusively designed dovetailed support system.
- Workpiece is fed through a conveyor belt that features automatic positioning.
- Cleaning scrapers can be conveniently controlled from outside without need to raise the grid guard.
- Rollers are easy to replace.
- Double air diaphragm pump does not create sparks, while ensuring operational safety and is air-pollution-free.
- The powered elevation design combined with limit switch provides over-travel protection. In case over-travel occurs, power shuts off automatically.
- The machine is available to operate with an extra large infeed roller conveyor.

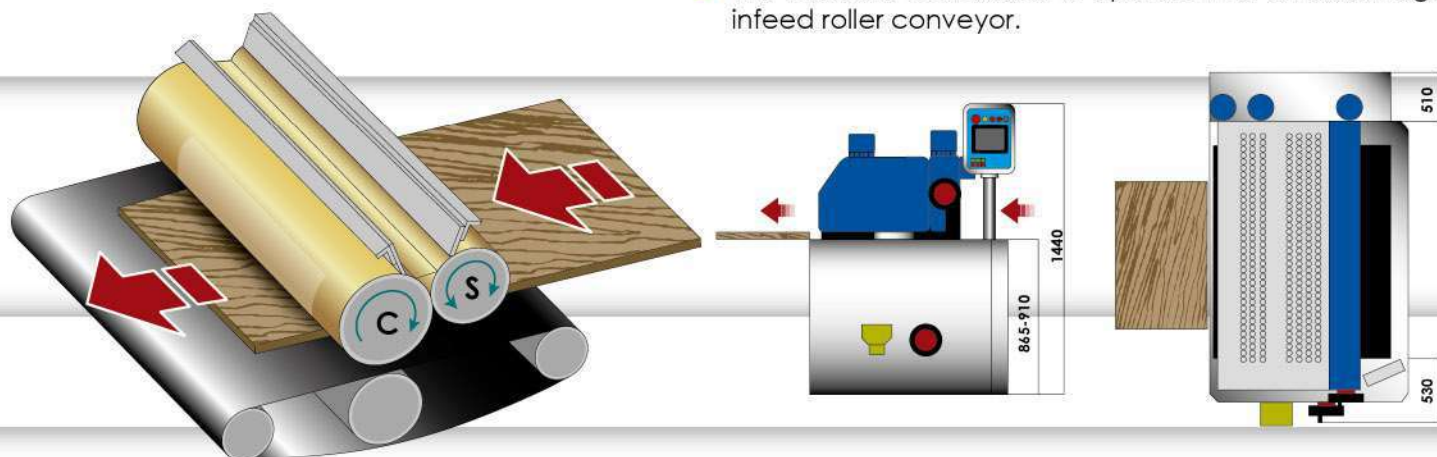

滾筒式平面塗裝機 ROLLER COATER

適用

以UV底、UV面、PU、NC、水性塗料塗裝地板/傢俱/木片/玻璃/壁板/地磚/合板...等平面塗裝之使用。

APPLICATIONS

Flat coating with UV base / surface, PU, NC and water-based lacquer for floor / furniture / wood slice / glass / wall plane / tile / plywood and so on.

SPECIFICATIONS

型號	Model	YL-W20-T	YL-W30-T	YL-W40-T	YL-W50-T
最大塗裝寬度	Maximum width of coating	610 mm	920 mm	1290 mm	1650 mm
最短塗裝長度	Minimum length of coating	300 mm	300 mm	300 mm	300 mm
工件厚度	Workpiece thickness range	2-80 mm	2-80 mm	2-80 mm	2-80 mm
輸送帶速度	Conveyor belt speed	10-20M/min 其它速度可依客戶指定 Other speeds are available			
● 塗佈輪尺寸(mm)	Coating roller sizes (mm)	Ø205x780	Ø250x1100	Ø250x1450	Ø250x1800
● 均佈輪尺寸(mm)	Smoothing roller sizes (mm)	Ø150x780	Ø175x1100	Ø175x1450	Ø175x1800
● 塗佈輪馬力	Coating roller motor	0.75 KW	1.5 KW	1.5 KW	1.5 KW
● 均佈輪馬力	Smoothing roller motor	0.18 KW	0.37 KW	0.37 KW	0.75 KW
輸送帶馬力	Conveyor belt motor	0.75 KW	1.5 KW	1.5 KW	1.5 KW
昇降馬力	Elevation motor	0.18 KW	0.18 KW	0.18 KW	0.37 KW
泵浦(氣壓式隔膜泵浦)	Pump (air diaphragm pump)	3 / 8"	1 / 2"	1 / 2"	3 / 4"

規格、尺寸、外型及顏色若有變更恕不另通知。 Specifications, dimensions, appearance and color are subject to change without prior notice.
可依客戶需求定製特殊規格。 Customization is available to meet special process requirements.



YL-W2T-T
YL-W3T-T
YL-W4T-T





特性

- 本機適用於平面塗裝。經本機處理過的工件，表面光滑、無色差。
- 每個滾輪應用獨立的變頻器做電子控制，產品品質可利用均佈滾筒的速度及壓力做調整可將漆完美的塗在工件上。
- 獨家鳩尾槽支撐系統的應用頭。
- 利用具有自動皮帶定位系統的皮帶輪運送工件。
- 清潔刀片具有外部的靠近及分離控制（不必升起保護柵欄）。
- 具有快速更換滾輪系統。
- 氣動雙隔膜泵浦，不產生火花，安全更不會有空氣污染之慮。
- 電動升降裝置與限動開關保護膠輪超厚斷電停止。
- 此機器可與加長型輸送機共用。

FEATURES

- This machine is applied for flat coating, providing workpieces of smooth finishing and consistent color.
- Each roller is independently controlled by a frequency inverter. The smoothing roller speed and pressure are adjustable, ensuring perfect coating on workpiece.
- The application head is supported by the exclusively designed dovetailed support system.
- Workpiece is fed through a conveyor belt that features automatic positioning.
- Cleaning scrapers can be conveniently controlled from outside without need to raise the grid guard.
- Rollers are easy to replace.
- Double air diaphragm pump does not create sparks, while ensuring operational safety and is air-pollution-free.
- The powered elevation design combined with limit switch provides over-travel protection. In case over-travel occurs, power shuts off automatically.
- The machine is available to operate with an extra large infeed roller conveyor.

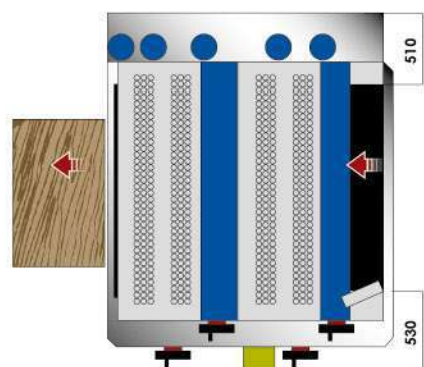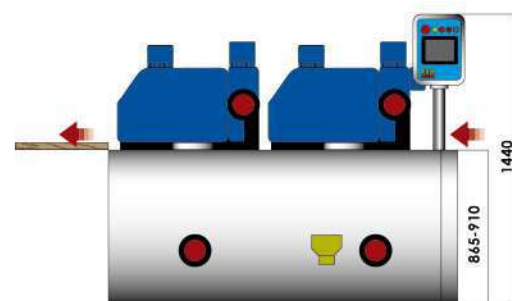

滾筒式平面塗裝機 ROLLER COATER

適用 本機可另外可做著色機使用。

以UV底、UV面、PU、NC、水性塗料塗裝地板/傢俱/木片/玻璃/壁板/地磚/合板...等平面塗裝之使用。

APPLICATIONS The machine is also suitable for staining.

Flat coating with UV base / surface, PU, NC and water-based lacquer for floor / furniture / wood slice / glass / wall plane / tile / plywood and so on.

SPECIFICATIONS

型號	Model	YL-W2T-T	YL-W3T-T	YL-W4T-T	YL-W5T-T
最大塗裝寬度	Maximun width of coating	610 mm	920 mm	1290 mm	1650 mm
最短塗裝長度	Minimun length of coating	300 mm	300 mm	300 mm	300 mm
工件厚度	Workpiece thickness range	2-80 mm	2-80 mm	2-80 mm	2-80 mm
輸送帶速度	Conveyor belt speed	10-20M/min 其它速度可依客戶指定 Other speeds are available			
塗佈輪尺寸(mm)	Coating roller sizes (mm)	Ø205x780	Ø250x1100	Ø250x1450	Ø250x1800
均佈輪尺寸(mm)	Smoothing roller sizes (mm)	Ø150x780	Ø175x1100	Ø175x1450	Ø175x1800
塗佈輪馬力	Coating roller motor	0.75 KW	1.5 KW	1.5 KW	1.5 KW
均佈輪馬力	Smoothing roller motor	0.18 KW	0.37 KW	0.37 KW	0.75 KW
輸送帶馬力	Conveyor belt motor	0.75 KW	1.5 KW	1.5 KW	1.5 KW
昇降馬力	Elevation motor	0.18 KW	0.18 KW	0.18 KW	0.37 KW
泵浦(氣壓式隔膜泵浦)	Pump (air diaphragm pump)	1 / 2"	1 / 2"	1 / 2"	3 / 4"

規格、尺寸、外型及顏色若有變更恕不另通知。 Specifications, dimensions, appearance and color are subject to change without prior notice.
可依客戶需求定製特殊規格。 Customization is available to meet special process requirements.

